


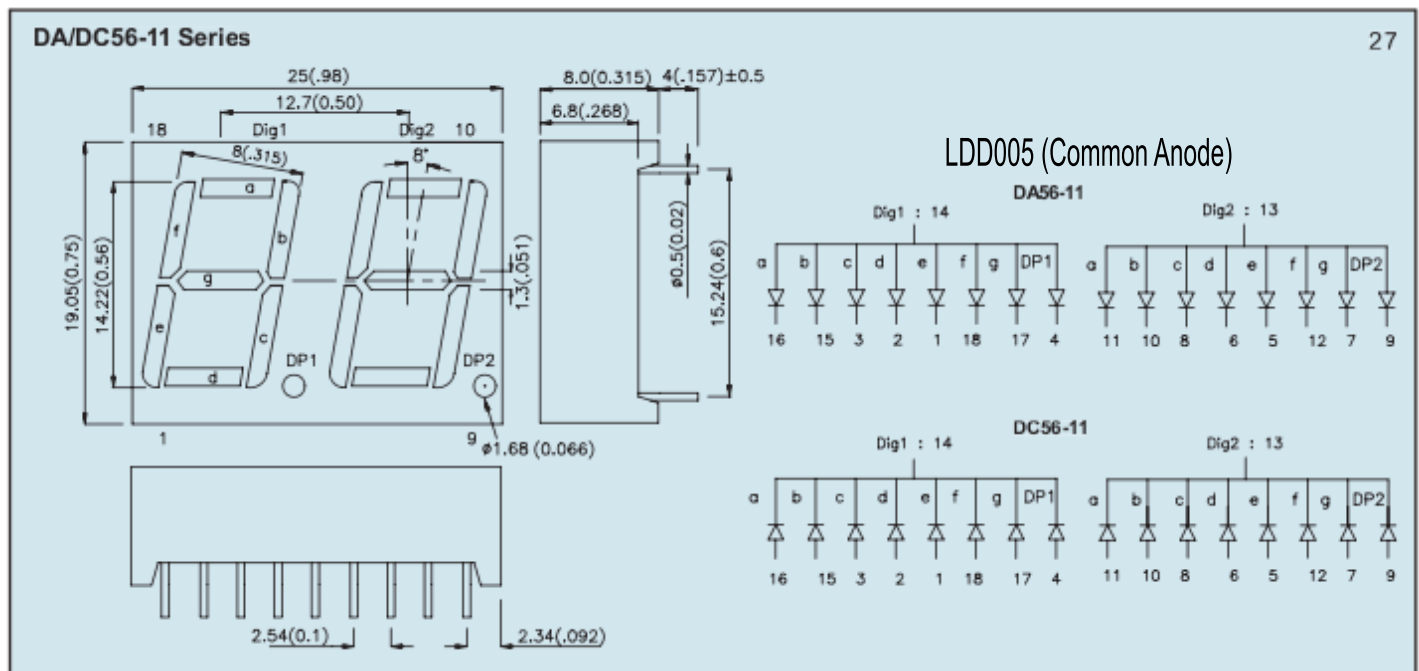

Two seven segment displays in a single package with 14mm character height.

Common anode type.

Red diffused package.

Luminous intensity 1.9mcd max at IF = 10mA.

Overall package size 25 x 19 x 8mm.

Specifications

Peak wavelength: 700nm

Forward voltage at IF = 20mA: 2V

Forward current max.: 25mA

Power dissipation: 120mW

Pin connections

- 1, Digit 1 cathode e
- 2, Digit 1 cathode d
- 3, Digit 1 cathode c
- 4, Digit 1 cathode decimal point
- 5, Digit 2 cathode e
- 6, Digit 2 cathode d
- 7, Digit 2 cathode g
- 8, Digit 2 cathode c
- 9, Digit 2 cathode decimal point
- 10, Digit 2 cathode b
- 11, Digit 2 cathode a
- 12, Digit 2 cathode f
- 13, Digit 2 common anode
- 14, Digit 1 common anode
- 15, Digit 1 cathode b
- 16, Digit 1 cathode a
- 17, Digit 1 cathode g
- 18, Digit 1 cathode f