



| REVISION DATA |     |             |      |
|---------------|-----|-------------|------|
| SYM           | ECN | DESCRIPTION | DATE |
|               |     |             |      |
|               |     |             |      |

4

3

2

1

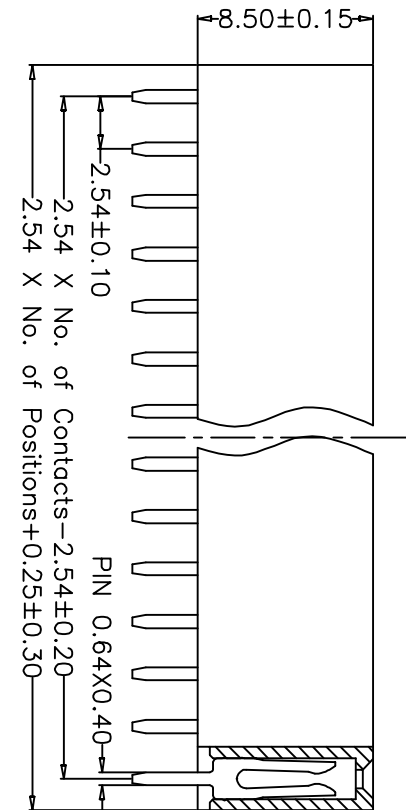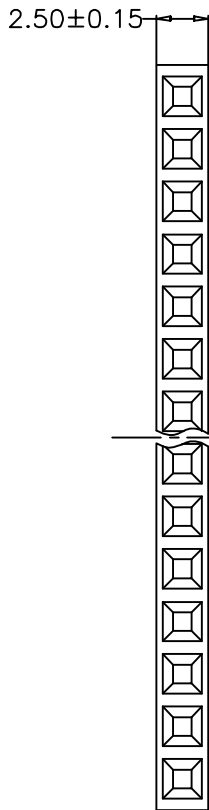

NOTES:  
Current Rating:3.0AMP  
Contact Resistance:20mΩ max  
Withstand Voltage:500V AC/DC  
Insulation Resistance:1000MΩ min  
Operation Temperature:-40℃ to +105℃

Contact Material:Brass  
Contact plating:Au or Sn Over Ni  
Insulator Material:PBT (UL94V-0)

3.20±0.25


PIN 0.64X0.40

2.54 X No. of Positions±0.25±0.30

2.54±0.10

8.50±0.15

Recommended P.C.B Layout(TOP Side)  
(PCB BOARD TOLERANCE±0.05)



深圳市五维电子有限公司

SHENZHEN WUWEI ELECTRONICS CO., LTD

| REV. | UNIT. | SCALE. | PAGE. |
|------|-------|--------|-------|
| A    | mm    | 2:1    | 1/1   |

GENERAL TOLERANCE

X. ± 5.0°

.XX ± 3.0°

.XXX ± 1.0°

DRAWN weifeng

CHECK

APPROVE

DATE 09-06-07

DATE

DATE

DWG. NO.

PART NO.

TITLE.

2.54FH-1xXP 180度  
H=8.5

4

3

2

1